

## PP 玻纖毯/板


## PP E-GLASS FIBER MAT/BOARD

將玻璃纖維與 PP ( 聚丙烯 ) 纖維複合針軋成棉毯，與面料一同壓製後，可使用在汽車頂棚、後置物板、遮陽板及車身下護板等。

PP 玻纖毯也可先壓製成 PP 玻纖板，便於包裝及運送，PP 玻纖板重新烘烤後，可回復 1.5~3 倍厚的毯狀形式，再依需求搭配壓製即可。


Use glass fiber and PP (polypropylene) fiber composite into mat and after pressing together the fabric can be used in the auto parts such as: headlining、rear parcel shelf、sun visor、splash shield and more.

PP glass fiber also can be processed into PP glass fiber board, in order to delivery and package easily. After re-baked PP glass fiber board, it can return to shape in the form of 1.5 to 3 times thicker blanket, and then by pressing to match demand

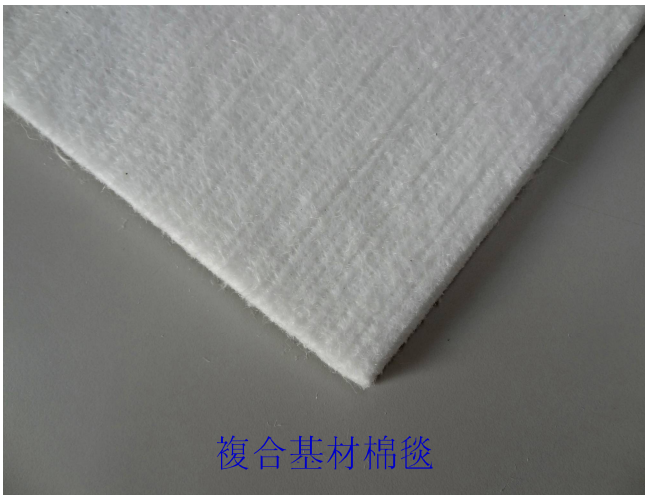

複合基材棉毯

Composite base material needle mat

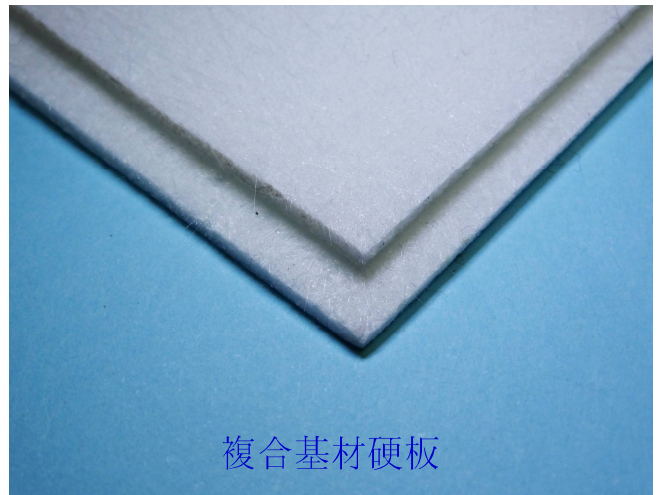

複合基材硬板

Composite base material hardboard

## 特性 PROPERTY

- 質輕、強韌堅固、易安裝  
Light weight, high strength and install easily.
- 成型後·尺寸穩定性好  
After molding, with good dimensional stability.
- 阻燃性能良好  
Excellent insulating materials.
- 成型時·無揮發毒性·是綠色環保產品  
During forming, non-toxic volatile and is a green environment product.
- 無苯、醛及酚類殘留及揮發  
Non-benzene、aldehyde and phenol volatile and with no remains.
- 孔隙度高·隔熱吸音性優良  
High porosity, excellent thermal conductivity and sound absorption.
- 抗濕熱老化性佳  
Excellent moisture-resistant and thermal aging.
- 易加工·低人工·高產能。  
Processing easily, low labor, high capacity.

## 規格 SPECIFICATIONS

1. PP 玻纖毯：厚:3~25mm x 寬:0.5~3.3M x 長:10~50M x 基重:700~2600g/m<sup>2</sup>

PP E-GLASS FIBER MAT: Thickness: 3~25mm \* Width: 0.5~3.3mm \* Density: 700~2600g/m<sup>2</sup>

2. PP 玻纖板：厚:1.8~7.5mm x 寬:2.5M max. x 長:3.5M max. x 基重:700~2600g/m<sup>2</sup>

PP E-GLASS FIBER BOARD: Thickness: 1.8~7.5mm \* Width: 2.5M max \* Density: 700~2600g/m<sup>2</sup>

## 材料組合 Combination of materials

玻纖與 PP (聚丙稀) 纖維：各 20~80%·可依產品需求及特性調整配比。

Glass fiber with PP (polypropylene) fiber: 20 to 80% each, according to product demand and characteristic adjustment ratio.